



Listing and Technical Evaluation Report™

Report No: 1203-03



Issue Date: March 30, 2012

Revision Date: May 9, 2024

Subject to Renewal: July 1, 2025

FastenMaster® LedgerLOK® Ledger Board Fasteners for Use in Deck Ledger Applications

Trade Secret Report Holder:

OMG®, Inc. dba FastenMaster

Phone: 413-789-0252 Website: www.fastenmaster.com Email: mguthrie@omginc.com

CSI Designations:

DIVISION: 06 00 00 - WOOD, PLASTICS AND COMPOSITES Section: 06 05 23 - Wood, Plastic, and Composite Fastenings

Section: 06 11 00 - Wood Framing Section: 06 15 00 - Wood Decking

1 Innovative Product Evaluated¹

1.1 LedgerLOK Ledger Board Fasteners

2 Product Description and Materials

2.1 The innovative product evaluated in this report is shown in **Figure 1**.

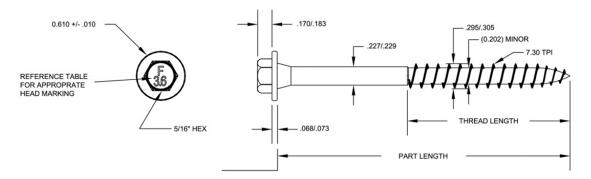


Figure 1. LedgerLOK Ledger Board Fasteners (in)





- 2.2 LedgerLOK Ledger Board Fasteners are manufactured with carbon steel grade 1022 or 10B21 wire conforming to ASTM A510 with a minimum ultimate tensile strength of 60 ksi.
- 2.3 LedgerLOK Ledger Board Fasteners are manufactured using a standard cold-formed process followed by a heat-treating process. Allowable bending yield and critical dimensions are found in **Figure 1** and **Table 1**.
 - 2.3.1 LedgerLOK Ledger Board Fasteners heads are a 5/16" hex drive with a built-in oversized washer.
 - 2.3.2 LedgerLOK Ledger Board Fasteners have a gimlet point.
- 2.4 **Table 1** shows the LedgerLOK Ledger Board Fasteners that were evaluated.

Table 1. Fastener Specifications

Fastener Name	Fastener Designation	Head Marking	Length ¹ (in)	Thread Length ² (in)	Unthreaded Shank Diameter (in)	Minor Thread	Nominal Bending	Allowable Fastener Strength (lb)	
						(Root) Diameter (in)	Yield Strength, F _{yb} (psi) ³	Tensile	Shear
LedgerLOK	FMLL358	F3.6	35/8	2	0.228	0.202	200,700	1,835	1,235
	FMLL005	F5.0	5	3	0.220				

SI: 1" = 25.4 mm, 1 psi = 0.00689 MPa

- 1. Measured from the underside of the head to the bottom of the tip
- 2. Includes tip; see Figure 1.
- 3. Determined in accordance with methods specified in ASTM F1575, based on minor thread diameter using a 5% offset of the load displacement curves developed from bending tests.
- 2.5 LedgerLOK Ledger Board Fasteners have a proprietary galvanized and epoxy coating, which provides corrosion protection that exceeds that provided by code approved hot-dipped galvanized coatings meeting ASTM A153 (IBC Section 2304.10.6² and IRC Section R317.3).
 - 2.5.1 LedgerLOK Ledger Board Fasteners are approved for use in exterior conditions and in pressure-treated wood, including ground contact ACQ. The proprietary coating has been tested and found to exceed the corrosion protection provided by code approved hot-dipped galvanized coatings meeting ASTM A153 (IBC Section 2304.10.6³ and IRC Section R317.3).
- 2.6 LedgerLOK Ledger Board Fasteners are approved for use in fire-retardant treated lumber, provided the conditions set forth by the fire-retardant treated lumber manufacturer are met, including appropriate strength reductions.
- 2.7 In-plant quality control procedures, under which the LedgerLOK Ledger Board Fasteners are manufactured, are audited through an inspection process performed by an approved agency.
- 2.8 As needed, review material properties for design in **Section 6** and to regulatory evaluation in **Section 8**.

3 Definitions

- 3.1 New Materials⁴ are defined as building materials, equipment, appliances, systems, or methods of construction not provided for by prescriptive and/or legislatively adopted regulations, known as alternative materials.⁵ The design strengths and permissible stresses shall be established by tests⁶ and/or engineering analysis.⁷
- 3.2 <u>Duly Authenticated Reports</u>⁸ and <u>Research Reports</u>⁹ are test reports and related engineering evaluations, which are written by an <u>approved agency</u>¹⁰ and/or an <u>approved source</u>. 11
 - 3.2.1 These reports contain intellectual property and/or trade secrets, which are protected by the <u>Defend Trade</u> Secrets Act (DTSA).¹²

Report Number: 1203-03 FastenMaster® LedgerLOK® Ledger Board Fasteners for Use in Deck Ledger Applications
Confidential Intellectual Property Is protected by Defend Trade Secrets Act 2016, ©DrJ Engineering, LLC

Subject to Renewal: 07/01/25





- 3.3 An <u>approved agency</u> is "approved" when it is <u>ANAB ISO/IEC 17065 accredited</u>. DrJ Engineering, LLC (DrJ) is listed in the <u>ANAB directory</u>.
- 3.4 An <u>approved source</u> is "approved" when a professional engineer (i.e., <u>Registered Design Professional</u>) is properly licensed to transact engineering commerce. The regulatory authority governing approved sources is the state legislature via its professional engineering regulations.¹³
- 3.5 Testing and/or inspections conducted for this <u>Duly Authenticated Report</u> were performed by an <u>ISO/IEC 17025</u> accredited testing laboratory, an <u>ISO/IEC 17020</u> accredited inspection body, and/or a licensed <u>Registered</u> Design Professional (RDP).
 - 3.5.1 The Center for Building Innovation (CBI) is ANAB¹⁴ ISO/IEC 17025 and ISO/IEC 17020 accredited.
- 3.6 The regulatory authority shall <u>enforce</u>¹⁵ the specific provisions of each legislatively adopted regulation. If there is a non-conformance, the specific regulatory section and language of the non-conformance shall be provided in <u>writing</u>¹⁶ stating the nonconformance and the path to its cure.
- 3.7 The regulatory authority shall accept <u>Duly Authenticated Reports</u> from an <u>approved agency</u> and/or an <u>approved source</u> with respect to the quality and manner of use of new materials or assemblies as provided for in regulations regarding the use of alternative materials, designs, or methods of construction.¹⁷
- 3.8 ANAB is an International Accreditation Forum (IAF) Multilateral Recognition Arrangement (MLA) signatory where recognition of certificates, validation, and verification statements issued by conformity assessment bodies accredited by all other signatories of the IAF MLA with the appropriate scope, shall be approved. 18 Therefore, all ANAB ISO/IEC 17065 Duly Authenticated Reports are approval equivalent. 19
- 3.9 Approval equity is a fundamental commercial and legal principle.²⁰

4 Applicable Standards for the Listing: Regulations for the Regulatory Evaluation²¹

- 4.1 Standards
 - 4.1.1 ANSI/AWC NDS: National Design Specification (NDS) for Wood Construction
 - 4.1.2 ASTM A153: Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
 - 4.1.3 ASTM A510: Standard Specification for General Requirements for Wire Rods and Coarse Round Wire, Carbon Steel, and Alloy Steel
 - 4.1.4 ASTM E72: Standard Test Methods of Conducting Tests of Panels for Building Construction
 - 4.1.5 ASTM F1575: Standard Test Method for Determining Bending Yield Moment of Nails
- 4.2 Regulations
 - 4.2.1 IBC 15, 18, 21: International Building Code®
 - 4.2.2 IRC 15, 18, 21: International Residential Code®

5 Listed²²

5.1 Equipment, materials, products or services included in a List published by a <u>nationally recognized testing laboratory</u> (i.e., CBI), <u>approved agency</u> (i.e., CBI and DrJ), and/or <u>approved source</u> (i.e., DrJ) or other organization concerned with product evaluation (i.e., DrJ) that maintains periodic inspection (i.e., CBI) of production of listed equipment or materials, and whose listing states either that the equipment or material meets nationally recognized standards or has been tested and found suitable for use in a specified manner.

Report Number: 1203-03 FastenMaster® LedgerLOK® Ledger Board Fasteners for Use in Deck Ledger Applications
Confidential Intellectual Property Is protected by Defend Trade Secrets Act 2016, ©DrJ Engineering, LLC

Subject to Renewal: 07/01/25





6 Tabulated Properties Generated from Nationally Recognized Standards

- 6.1 LedgerLOK Ledger Board Fasteners are designed specifically for attaching the deck ledger to the rim joist of a building in accordance with IBC Section 1604.8.3 and IRC Section R507.9.²³
- 6.2 The IRC provides prescriptive fastener spacing for the attachment of a deck ledger to a rim joist with 1/2" diameter lag screws or through bolts as shown in IRC Table R507.9.1.3(1).²⁴
- 6.3 **Table 2** provides the LedgerLOK Ledger Board Fasteners spacing required to provide performance at least equivalent to the lag screws found in <u>IRC Table R507.9.1.3(1)</u>²⁵ in accordance with <u>IBC Section 104.11</u>, <u>IBC Section 1604.8.3</u>, IRC Section R104.11 and IRC Section R507.9, and generally accepted engineering practice.
 - 6.3.1 **Table 2** provides LedgerLOK Ledger Board Fasteners spacing for items found in <u>IRC Table R507.9.1.3(1)</u>, ²⁶ as well as a wider range of materials commonly used for rim joists.





Table 2. LedgerLOK Ledger Board Fasteners Spacing for Items in IRC Table R507.9.1.3(1) and Other Materials and Loading Conditions

Loading Condition	2x Nominal		Maximum On-center Spacing of LedgerLOK Ledger Board Fasteners (in)							
		Rim Joist	Maximum Deck Joist Spans ^{1,2,4,5,6} (ft)							
(psf)	Ledger Species	Material ³	Up to 6'	Up to 8'	Up to 10'	Up to 12'	Up to 14'	Up to 16'	Up to 18'	
LL + DL 40 + 10	HF/SPF	2x Nominal Sawn Lumber	20	15	12	10	8	7	6	
		1" min EWP	25	19	15	12	10	9	8	
	DF/SP	Nominal Sawn Lumber	24	18	14	12	10	9	8	
		1" min EWP	25	19	15	12	10	9	8	
SL + DL 50 + 10	HF/SPF	2x Nominal Sawn Lumber	17	12	10	8	7	6	5	
		1" min EWP	21	16	12	10	9	8	7	
	DF/SP	Nominal Sawn Lumber	20	15	12	10	8	7	6	
		1" min EWP	21	16	12	10	9	8	7	
SL + DL 60 + 10	HF/SPF	2x Nominal Sawn Lumber	14	11	8	7	6	5	4	
		1" min EWP	18	13	10	9	7	6	6	
	DF/SP	Nominal Sawn Lumber	17	13	10	8	7	6	5	
		1" min EWP	18	13	10	9	7	6	6	
SL + DL 70 + 10	HF/SPF	2x Nominal Sawn Lumber	12	9	7	6	5	4	4	
		1" min EWP	16	12	9	8	6	6	5	
	DF/SP	Nominal Sawn Lumber	15	11	9	7	6	5	5	
	DI /OF	1" min EWP	16	12	9	8	6	6	5	

SI: 1" = 25.4 mm, 1 psf = 0.0479 kN/m²

- 1. Based on load duration of 1.0. Spacing may be adjusted by the applicable load duration as specified in NDS.
- 2. Fasteners are required to have full thread penetration into the main member. Excess fastener length extending beyond the main member is not reflected in the table above.
- 3. Solid sawn rim joists shall be HF, SPF, DF-L or SP species, designed by others.
- 4. Fastener spacing is based on tested loads. The design values use the lesser of a 1/8" deflection limitation or a factor of safety equivalent to or greater than that of the code compliant lag screw application as defined in **Figure 2**.
- 5. Fasteners shall be staggered from the top to the bottom along the length of the ledger while maintaining the required edge and end distances shown in Figure 2.
- 6. A maximum 1/2" structural sheathing may be installed between the ledger and the band joist.
- 6.4 When installed in accordance with the spacing requirements of **Table 2**, LedgerLOK Ledger Board Fasteners provide equivalent performance to IRC Table R507.9.1.3(1).²⁷
- 6.5 Where the application falls outside of the performance evaluation, conditions of use and/or installation requirements set forth herein, alternative techniques shall be permitted in accordance with accepted engineering practice and experience. This includes but is not limited to the following areas of engineering: mechanics or materials, structural, building science and fire science.





7 Certified Performance²⁸

- 7.1 All construction methods shall conform to accepted engineering practices to ensure durable, livable, and safe construction and shall demonstrate acceptable workmanship reflecting journeyman quality of work of the various trades.²⁹
- 7.2 The strength and rigidity of the component parts and/or the integrated structure shall be determined by engineering analysis or by suitable load tests to simulate the actual loads and conditions of application that occur.³⁰

8 Regulatory Evaluation and Accepted Engineering Practice

- 8.1 LedgerLOK Ledger Board Fasteners comply with the following legislatively adopted regulations and/or accepted engineering practice for the following reasons:
 - 8.1.1 LedgerLOK Ledger Board Fasteners were evaluated to determine their ability to provide code complying attachment of deck ledger boards to the building structure.
 - 8.1.2 For conventionally framed buildings, the ledger is required to be attached to the band joist³¹ in accordance with IBC Section 1604.8.3 or IRC Section R507.9,³² as applicable.
 - 8.1.2.1 This evaluation provides fastening patterns for LedgerLOK Ledger Board Fasteners in a format similar to what is presented in IRC Table R507.9.1.3(1).³³
 - 8.1.2.2 Where a band joist is not used, as in some truss installations, an engineered design is required.
 - 8.1.2.3 Ultimate connection capacities and deflections of typical ledger board connections were match tested and evaluated pursuant to the provisions of the IBC and IRC.
- 8.2 Any building code, regulation, and/or accepted engineering evaluations (i.e., research reports, <u>Duly Authenticated Reports</u>, etc.) that are conducted for this Listing were performed by DrJ Engineering, LLC (DrJ), an <u>ISO/IEC 17065 accredited certification body</u> and a professional engineering company operated by <u>RDP/approved sources</u>. DrJ is qualified³⁴ to practice product and regulatory compliance services within its scope of accreditation and engineering expertise, respectively.
- 8.3 Engineering evaluations are conducted with DrJ's ANAB <u>accredited ICS code scope</u> of expertise, which are also its areas of professional engineering competence.
- 8.4 Any regulation specific issues not addressed in this section are outside the scope of this report.

9 Installation

- 9.1 Installation shall comply with the approved construction documents, the manufacturer installation instructions, this report and the applicable building code.
- 9.2 In the event of a conflict between the manufacturer installation instructions and this report, the more restrictive shall govern.
- 9.3 For applications outside the scope of this report, an engineered design is required.
- 9.4 Installation Procedure
 - 9.4.1 Choose 3³/₈" or 5" LedgerLOK Ledger Board Fasteners so that the threads fully engage the rim material and the fastener tip extends beyond the back face of the rim material when fully seated against the installed ledger.
 - 9.4.2 Using a high-torque, 1/2" variable-speed drill, 18V if cordless, drive the fasteners through the ledger and sheathing. Continue into the rim joist until the built-in washer head is drawn firm and flush to the ledger board. Do not overdrive.
 - 9.4.3 **Figure 2** shows a detail of LedgerLOK Ledger Board Fasteners deck connection, including minimum edge and end distances.





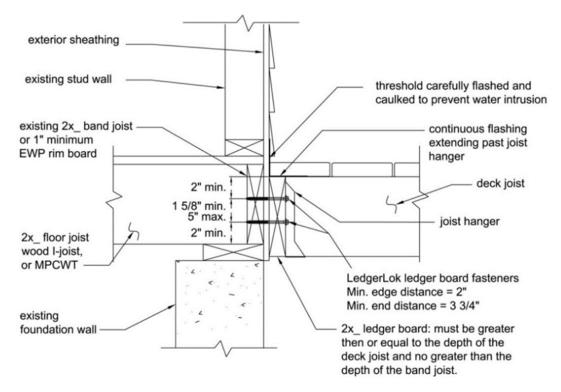


Figure 2. LedgerLOK Ledger Board Fasteners Deck Connection

9.4.4 Stagger the fasteners from the top to the bottom along the length of the ledger while maintaining the required edge and end distances.

10 Substantiating Data

- 10.1 Testing has been performed under the supervision of a professional engineer and/or under the requirements of ISO/IEC 17025 as follows:
 - 10.1.1 Deck ledger assembly testing in accordance with ASTM E72
- 10.2 DCA 6, Prescriptive Residential Wood Deck Construction Guide; AF&PA; 2010
- 10.3 FastenMaster Technical Bulletin; LedgerLOK® Ledger Board Fastener; 2011
- 10.4 Information contained herein may include the result of testing and/or data analysis by sources that are approved agencies, approved sources, and/or RDPs. Accuracy of external test data and resulting analysis is relied upon.
- 10.5 Where pertinent, testing and/or engineering analysis are based upon provisions that have been codified into law through state or local adoption of regulations and standards. The developers of these regulations and standards are responsible for the reliability of published content. DrJ's engineering practice may use a regulation-adopted provision as the control. A regulation-endorsed control versus a simulation of the conditions of application to occur establishes a new material as being equivalent to the regulatory provision in terms of quality, strength, effectiveness, fire resistance, durability, and safety.
- 10.6 The accuracy of the provisions provided herein may be reliant upon the published properties of raw materials, which are defined by the grade mark, grade stamp, mill certificate, or Duly Authenticated Reports from approved agencies and/or approved sources provided by the supplier. These are presumed to be minimum properties and relied upon to be accurate. The reliability of DrJ's engineering practice, as contained in this Duly Authenticated Report, may be dependent upon published design properties by others.





- 10.7 Testing and engineering analysis: The strength, rigidity, and/or general performance of component parts and/or the integrated structure are determined by suitable tests that simulate the actual conditions of application that occur and/or by accepted engineering practice and experience.³⁵
- 10.8 Where additional condition of use and/or regulatory compliance information is required, please search for LedgerLOK Ledger Board Fasteners on the DrJ Certification website.

11 Findings

- 11.1 As outlined in **Section 6**, LedgerLOK Ledger Board Fasteners have performance characteristics that were tested and/or meet applicable regulations and are suitable for use pursuant to its specified purpose.
- 11.2 When used and installed in accordance with this <u>Duly Authenticated Report</u> and the manufacturer installation instructions, LedgerLOK Ledger Board Fasteners shall be approved for the following applications:
 - 11.2.1 FastenMaster LedgerLOK Ledger Board Fasteners are a suitable alternative to the requirements of the <u>IBC Section 1604.8.3</u> and <u>IRC Section R507.9</u>.36
- 11.3 Unless exempt by state statute, when LedgerLOK Ledger Board Fasteners are to be used as a structural and/or building envelope component in the design of a specific building, the design shall be performed by an RDP.
- 11.4 Any application specific issues not addressed herein can be engineered by an <u>RDP</u>. Assistance with engineering is available from FastenMaster.
- 11.5 IBC Section 104.11 (IRC Section R104.11 and IFC Section 104.10³⁷ are similar) in pertinent part states:
 - **104.11** Alternative materials, design and methods of construction and equipment. The provisions of this code are not intended to prevent the installation of any material or to prohibit any design or method of construction not specifically prescribed by this code. Where the alternative material, design or method of construction is not approved, the building official shall respond in writing, stating the reasons the alternative was not approved.
- 11.6 Approved: 38 Building regulations require that the building official shall accept Duly Authenticated Reports. 39
 - 11.6.1 An approved agency is "approved" when it is ANAB ISO/IEC 17065 accredited.
 - 11.6.2 An approved source is "approved" when an RDP is properly licensed to transact engineering commerce.
 - 11.6.3 Federal law, <u>Title 18 US Code Section 242</u>, requires that where the alternative product, material, service, design, assembly, and/or method of construction is not approved, the building official shall respond in writing, stating the reasons why the alternative was not approved. Denial without written reason deprives a protected right to free and fair competition in the marketplace.
- 11.7 DrJ is a licensed engineering company, employs licensed <u>RDP</u>s and is an <u>ANAB-Accredited Product</u> Certification Body Accreditation #1131.
- 11.8 Through the <u>IAF Multilateral Agreements</u> (MLA), this <u>Duly Authenticated Report</u> can be used to obtain product approval in any <u>jurisdiction</u> or <u>country</u> because all ANAB ISO/IEC 17065 <u>Duly Authenticated Reports</u> are equivalent.⁴⁰





12 Conditions of Use

- 12.1 Material properties shall not fall outside the boundaries defined in **Section 6**.
- 12.2 As defined in **Section 6**, where material and/or engineering mechanics properties are created for load resisting design purposes, the resistance to the applied load shall not exceed the ability of the defined properties to resist those loads using the principles of accepted engineering practice.
- 12.3 As listed herein, LedgerLOK Ledger Board Fasteners shall not:
 - 12.3.1 Exceed **Table 2** for code compliance and the installation conditions considered.
- 12.4 When required by adopted legislation and enforced by the <u>building official</u>, also known as the authority having jurisdiction (AHJ) in which the project is to be constructed:
 - 12.4.1 Any calculations incorporated into the construction documents shall conform to accepted engineering practice and, when prepared by an approved source, shall be approved when signed and sealed.
 - 12.4.2 This report and the installation instructions shall be submitted at the time of permit application.
 - 12.4.3 This innovative product has an internal quality control program and a third-party quality assurance program.
 - 12.4.4 At a minimum, this innovative product shall be installed per **Section 9** of this report.
 - 12.4.5 The review of this report by the AHJ shall comply with IBC Section 104 and IBC Section 105.4.
 - 12.4.6 This innovative product has an internal quality control program and a third party quality assurance program in accordance with IBC Section 104.4, IBC Section 1703, IRC Section R104.4, and IRC Section R104.4, and IRC Section R109.2.
 - 12.4.7 The application of this innovative product in the context of this report is dependent upon the accuracy of the construction documents, implementation of installation instructions, inspection as required by <u>IBC Section</u> 110.3, IRC Section R109.2, and any other regulatory requirements that may apply.
- 12.5 The approval of this report by the AHJ shall comply with <u>IBC Section 1707.1</u>, where legislation states in part, "the <u>building official</u> shall accept duly authenticated reports from <u>approved agencies</u> in respect to the quality and manner of <u>use</u> of new material or assemblies as provided for in <u>Section 104.11</u>," all of <u>IBC Section 104</u>, and IBC Section 105.4.
- 12.6 <u>Design loads</u> shall be determined in accordance with the regulations adopted by the <u>jurisdiction</u> in which the project is to be constructed and/or by the building designer (i.e., <u>owner</u> or <u>RDP</u>).
- 12.7 The actual design, suitability, and use of this report for any particular building, is the responsibility of the <u>owner</u> or the authorized agent of the owner.





13 Identification

- 13.1 The innovative product listed in **Section 1.1** is identified by a label on the board or packaging material bearing the manufacturer name, product name, this report number, and other information to confirm code compliance.
- 13.2 Additional technical information can be found at www.fastenmaster.com.

14 Review Schedule

- 14.1 This report is subject to periodic review and revision. For the latest version, visit dricertification.org.
- 14.2 For information on the status of this report, please contact <u>DrJ Certification</u>.

15 Approved for Use Pursuant to U.S. and International Legislation Defined in Appendix A

15.1 LedgerLOK Ledger Board Fasteners are included in this report published by an approved agency that is concerned with evaluation of products or services, maintains periodic inspection of the production of listed materials or periodic evaluation of services. This report states either that the material, product, or service meets recognized standards or has been tested and found suitable for a specified purpose. This report meets the legislative intent and definition of being acceptable to the AHJ.





Appendix A

1 Legislation that Authorizes AHJ Approval

- 1.1 **Fair Competition**: <u>State legislatures</u> have adopted Federal regulations for the examination and approval of building code referenced and alternative products, materials, designs, services, assemblies and/or methods of construction that:
 - 1.1.1 Advance innovation
 - 1.1.2 Promote competition so all businesses have the opportunity to compete on price and quality in an open market on a level playing field unhampered by anticompetitive constraints
 - 1.1.3 Benefit consumers through lower prices, better quality, and greater choice
- 1.2 **Adopted Legislation**: The following local, state, and federal regulations affirmatively authorize this innovative product to be approved by AHJs, delegates of building departments, and/or delegates of an agency of the federal government:
 - 1.2.1 Interstate commerce is governed by the <u>Federal Department of Justice</u> to encourage the use of innovative products, materials, designs, services, assemblies, and/or methods of construction. The goal is to "protect economic freedom and opportunity by promoting free and fair competition in the marketplace."
 - 1.2.2 <u>Title 18 US Code Section 242</u> affirms and regulates the right of individuals and businesses to freely and fairly have new products, materials, designs, services, assemblies, and/or methods of construction approved for use in commerce. Disapproval of alternatives shall be based upon non-conformance with respect to specific provisions of adopted legislation and shall be provided in writing <u>stating the reasons why the alternative was not approved</u>, with reference to the specific legislation violated.
 - 1.2.3 The <u>federal government</u> and each state have a <u>public records act</u>. In addition, each state also has legislation that mimics the federal <u>Defend Trade Secrets Act 2016</u> (DTSA),⁴¹ where providing test reports, engineering analysis and/or other related IP/TS is subject to <u>prison of not more than ten years</u>⁴² and/or a \$5,000,000 fine or 3 times the value of⁴³ the Intellectual Property (IP) and Trade Secrets (TS).
 - 1.2.3.1 Compliance with public records and trade secret legislation requires approval through the use of <u>Listings</u>, certified reports, <u>Technical Evaluation Reports</u>, <u>Duly Authenticated Reports</u>, and/or <u>research reports</u> prepared by <u>approved agencies</u> and/or <u>approved sources</u>.
 - 1.2.4 For <u>new materials</u>⁴⁴ that are not specifically provided for in any regulation, the <u>design strengths and</u> <u>permissible stresses</u> shall be established by <u>tests</u>, where <u>suitable load tests simulate the actual loads and</u> conditions of application that occur.
 - 1.2.5 The <u>design strengths and permissible stresses</u> of any structural material shall <u>conform</u> to the specifications and methods of design using accepted engineering practice.⁴⁵
 - 1.2.6 The commerce of <u>approved sources</u> (i.e., registered PEs) is regulated by <u>professional engineering</u> <u>legislation</u>. Professional engineering <u>commerce shall always be approved</u> by AHJs, except where there is evidence provided in writing, that specific legislation have been violated by an individual registered PE.
 - 1.2.7 The AHJ shall accept <u>Duly Authenticated Reports</u> from <u>approved agencies</u> in respect to the quality and manner of use of new materials or assemblies as provided for in IBC Section 104.11.⁴⁶





- 1.3 Approved⁴⁷ by Los Angeles: The Los Angeles Municipal Code (LAMC) states in pertinent part that the provisions of LAMC are not intended to prevent the use of any material, device, or method of construction not specifically prescribed by LAMC. The Department shall use Part III, Recognized Standards in addition to Part II, Uniform Building Code Standards of Division 35, Article 1, Chapter IX of the LAMC in evaluation of products for approval where such standard exists for the product or the material and may use other approved standards that apply. Whenever tests or certificates of any material or fabricated assembly are required by Chapter IX of the LAMC, such tests or certification shall be made by a testing agency approved by the Superintendent of Building to conduct such tests or provide such certifications. The testing agency shall publish the scope and limitation(s) of the listed material or fabricated assembly.⁴⁸ The Superintendent of Building Approved Testing Agency Roster is provided by the Los Angeles Department of Building and Safety (LADBS). The Center for Building Innovation (CBI) Certificate of Approval License is TA24945. Tests and certifications found in a DrJ Listing are LAMC approved. In addition, the Superintendent of Building shall accept Duly Authenticated Reports from approved agencies in respect to the quality and manner of use of new materials or assemblies as provided for in the California Building Code (CBC) Section 1707.1.⁴⁹
- 1.4 Approved by Chicago: The Municipal Code of Chicago (MCC) states in pertinent part that an Approved Agency is a Nationally Recognized Testing Laboratory (NRTL) acting within its recognized scope and/or a certification body accredited by the American National Standards Institute (ANSI) acting within its accredited scope. Construction materials and test procedures shall conform to the applicable standards listed in the MCC. Sufficient technical data shall be submitted to the building official to substantiate the proposed use of any product, material, service, design, assembly, and/or method of construction not specifically provided for in the MCC. This technical data shall consist of research reports from approved sources (i.e., MCC defined Approved Agencies).
- 1.5 **Approved by New York City**: The 2022 NYC Building Code (NYCBC) states in part that an approved agency shall be deemed⁵⁰ an approved testing agency via ISO/IEC 17025 accreditation, an approved inspection agency via ISO/IEC 17020 accreditation, and an approved product evaluation agency via ISO/IEC 17065 accreditation. Accrediting agencies, other than federal agencies, must be members of an internationally recognized cooperation of laboratory and inspection accreditation bodies subject to a mutual recognition agreement⁵¹ (i.e., ANAB, International Accreditation Forum [IAF], etc.).
- 1.6 **Approved by Florida**: <u>Statewide approval</u> of products, methods, or systems of construction shall be approved, without further evaluation by:
 - 1.6.1 A certification mark or listing of an approved certification agency,
 - 1.6.2 A test report from an approved testing laboratory,
 - 1.6.3 A product evaluation report based upon testing or comparative or rational analysis, or a combination thereof, from an approved product evaluation entity, or
 - 1.6.4 A product evaluation report based upon testing, comparative or rational analysis, or a combination thereof, developed, signed and sealed by a professional engineer or architect, licensed in Florida.
 - 1.6.5 For local product approval, products or systems of construction shall demonstrate compliance with the structural wind load requirements of the Florida Building Code (FBC) through one of the following methods:
 - 1.6.5.1 A certification mark, listing or label from a commission-approved certification agency indicating that the product complies with the code,
 - 1.6.5.2 A test report from a commission-approved testing laboratory indicating that the product tested complies with the code,
 - 1.6.5.3 A product-evaluation report based upon testing, comparative or rational analysis, or a combination thereof, from a commission-approved product evaluation entity which indicates that the product evaluated complies with the code,





- 1.6.5.4 A product-evaluation report or certification based upon testing or comparative or rational analysis, or a combination thereof, developed and signed and sealed by a Florida professional engineer or Florida registered architect, which indicates that the product complies with the code, or
- 1.6.5.5 A statewide product approval issued by the Florida Building Commission.
- 1.6.6 The <u>Florida Department of Business and Professional Regulation</u> (DBPR) website provides a listing of companies certified as a <u>Product Evaluation Agency</u> (i.e., EVLMiami 13692), a <u>Product Certification Agency</u> (i.e., CER10642), and as a <u>Florida Registered Engineer</u> (i.e., ANE13741).
- 1.7 **Approved by Miami-Dade County (i.e., Notice of Acceptance [NOA])**: A Florida statewide approval is an NOA. An NOA is a Florida local product approval. By Florida law, Miami-Dade County shall accept the statewide and local Florida Product Approval as provided for in Florida legislation 553.842 and 553.8425.
- 1.8 **Approved by New Jersey**: Pursuant to the 2018 Building Code of New Jersey in <u>IBC Section 1707.1</u>

 <u>General</u>, ⁵² it states: "In the absence of approved rules or other approved standards, the building official shall accept duly authenticated reports from <u>approved agencies</u> in respect to the quality and manner of use of new materials or assemblies as provided for in the administrative provisions of the Uniform Construction Code (<u>N.J.A.C. 5:23</u>)". ⁵³ Furthermore N.J.A.C 5:23-3.7 states: "Municipal approvals of alternative materials, equipment, or methods of construction."
 - 1.8.1 **Approvals**: Alternative materials, equipment, or methods of construction shall be approved by the appropriate subcode official provided the proposed design is satisfactory and that the materials, equipment, or methods of construction are suitable for the intended use and are at least the equivalent in quality, strength, effectiveness, fire resistance, durability, and safety of those conforming with the requirements of the regulations.
 - 1.8.1.1 A field evaluation label and report or letter issued by a nationally recognized testing laboratory verifying that the specific material, equipment, or method of construction meets the identified standards or has been tested and found to be suitable for the intended use, shall be accepted by the appropriate subcode official as meeting the requirements of the above.
 - 1.8.1.2 Reports of engineering findings issued by nationally recognized evaluation service programs such as but not limited to, the Building Officials and Code Administrators (BOCA), the International Conference of Building Officials (ICBO), the Southern Building Code Congress International (SBCCI), the International Code Council (ICC), and the National Evaluation Service, Inc., shall be accepted by the appropriate subcode official as meeting the requirements of the above.
 - 1.8.2 The New Jersey Department of Community Affairs has confirmed that technical evaluation reports, from any accredited entity listed by ANAB, meets the requirements of item the previous paragraph, given that the listed entities are no longer in existence and/or do not provide "reports of engineering findings."
- 1.9 Approved by the Code of Federal Regulations Manufactured Home Construction and Safety Standards: Pursuant to Title 24, Subtitle B, Chapter XX, Part 3282.14⁵⁴ and Part 3280,⁵⁵ the Department encourages innovation and the use of new technology in manufactured homes. The design and construction of a manufactured home shall conform to the provisions of Part 3282 and Part 3280 where key approval provisions in mandatory language follow:
 - 1.9.1 "All construction methods shall be in conformance with accepted engineering practices."
 - 1.9.2 "The strength and rigidity of the component parts and/or the integrated structure shall be determined by engineering analysis or by suitable load tests to simulate the actual loads and conditions of application that occur."
 - 1.9.3 "The design stresses of all materials shall conform to accepted engineering practice."





- 1.10 **Approval by US, Local and State Jurisdictions in General**: In all other local and state jurisdictions, the adopted building code legislation states in pertinent part that:
 - 1.10.1 For <u>new materials</u> that are not specifically provided for in this code, the <u>design strengths and permissible</u> stresses shall be established by tests.⁵⁶
 - 1.10.2 For innovative <u>alternatives</u> and/or methods of construction, the building official shall accept <u>Duly</u>
 <u>Authenticated Reports</u> from <u>approved agencies</u> with respect to the quality and manner of use of <u>new</u>
 materials or assemblies.⁵⁷
 - 1.10.2.1 An <u>approved agency</u> is "approved" when it is <u>ANAB ISO/IEC 17065 accredited</u>. DrJ Engineering, LLC (DrJ) is in the ANAB directory.
 - 1.10.2.2 An <u>approved source</u> is "approved" when an <u>RDP</u> is properly licensed to transact engineering commerce. The regulatory authority governing approved sources is the <u>state legislature</u> via its professional engineering regulations.⁵⁸
 - 1.10.3 The <u>design strengths and permissible stresses</u> of any structural material...shall conform to the specifications and methods of design of accepted engineering practice performed by an <u>approved</u> source.⁵⁹
- 1.11 **Approval by International Jurisdictions**: The <u>USMCA</u> and <u>GATT</u> agreements provide for approval of innovative materials, designs, services, and/or methods of construction through the <u>Agreement on Technical Barriers to Trade</u> and the <u>IAF Multilateral Recognition Arrangement</u> (MLA), where these agreements:
 - 1.11.1 State that conformity assessment procedures (i.e., ISO/IEC 17020, 17025, 17065, etc.) are prepared, adopted, and applied so as to grant access for suppliers of like products originating in the territories of other Members under conditions no less favourable than those accorded to suppliers of like products of national origin or originating in any other country, in a comparable situation.
 - 1.11.2 **Approved**: The <u>purpose of the MLA</u> is to ensure mutual recognition of accredited certification and validation/verification statements between signatories to the MLA and subsequently, acceptance of accredited certification and validation/verification statements in many markets based on one accreditation for the timely approval of innovative materials, designs, services, and/or methods of construction.
 - 1.11.3 ANAB is an <u>IAF-MLA</u> signatory where recognition of certificates, validation, and verification statements issued by conformity assessment bodies accredited by all other signatories of the IAF MLA, with the appropriate scope, shall be approved.⁶⁰
 - 1.11.4 Therefore, all ANAB ISO/IEC 17065 <u>Duly Authenticated Reports</u> are approval equivalent. 61
- 1.12 Approval equity is a fundamental commercial and legal principle. 62





Notes

- For more information, visit dricertification.org or call us at 608-310-6748.
- 2018 IBC Section 2304.10.5
- 2018 IBC Section 2304.10.5
- https://up.codes/viewer/wyoming/ibc-2021/chapter/17/special-inspections-and-tests#1702
- Alternative Materials, Design and Methods of Construction and Equipment: The provisions of any regulation code are not intended to prevent the installation of any material or to prohibit any design or method of construction not specifically prescribed by a regulation. Please review https://www.justice.gov/atr/mission and https://up.codes/viewer/colorado/ibc-2021/chapter/1/scope-and-administration#104.11
- https://up.codes/viewer/wyoming/ibc-2021/chapter/17/special-inspections-and- $\underline{\text{tests}\#1706:} \text{-:} \underline{\text{text}} = \text{the} \%20 \underline{\text{design}} \%20 \underline{\text{strengths}} \%20 \underline{\text{and}} \%20 \underline{\text{permissible}} \%20 \underline{\text{strengths}} \%20 \underline{\text$
- The design strengths and permissible stresses of any structural material shall conform to the specifications and methods of design of accepted engineering practice. https://up.codes/viewer/wyoming/ibc-2021/chapter/17/special-inspections-andtests#1706:~:text=shall%20conform%20to%20the%20specifications%20and%20methods%20of%20design%20of%20accepted%20engineering%20practice
- https://up.codes/viewer/wyoming/ibc-2021/chapter/17/special-inspections-and- $\underline{tests\#1707.1:\sim:text=the\%20building\%20official\%20shall\%20accept\%20duly\%20authenticated\%20reports\%20from\%20approved\%20agencies with the first of t$
- https://up.codes/viewer/wyoming/ibc-2021/chapter/17/special-inspections-and-tests#1703.4.2
- 10 https://up.codes/viewer/wyoming/ibc-2021/chapter/2/definitions#approved_agency
- 11 https://up.codes/viewer/wyoming/ibc-2021/chapter/2/definitions#approved_source
- 12 https://www.law.cornell.edu/uscode/text/18/1832 (b) Any organization that commits any offense described in subsection (a) shall be fined not more than the greater of \$5,000,000 or 3 times the value of the stolen trade secret to the organization, including expenses for research and design and other costs of reproducing the trade secret that the organization has thereby avoided. The federal government and each state have a public records act. To follow DTSA and comply state public records and trade secret legislation requires approval through ANAB ISO/IEC 17065 accredited certification bodies or approved sources. For more information, please review this website: Intellectual Property and Trade Secrets.
- 13 https://www.nspe.org/resources/issues-and-advocacy/professional-policies-and-position-statements/regulation-professional_AND https://apassociation.org/list-of-engineeringboards-in-each-state-archive/
- https://www.cbitest.com/accreditation/
- 15 https://up.codes/viewer/colorado/ibc-2021/chapter/1/scope-and-administration#104:~:text=to%20enforce%20the%20provisions%20of%20this%20code
- https://up.codes/viewer/colorado/ibc-2021/chapter/1/scope-and
 - administration#104.11:~:text=Where%20the%20alternative%20material%2C%20design%20or%20method%20of%20construction%20is%20not%20approved%2C%20the%20buildi ng%20official%20shall%20respond%20in%20writing%2C%20stating%20the%20reasons%20why%20the%20alternative%20was%20not%20approved AND https://up.codes/viewer/colorado/ibc-2021/chapter/1/scope-and-
 - administration#105.3.1:~:text=If%20the%20application%20th%20the%20construction%20documents%20do%20not%20conform%20to%20the%20requirements%20of%20pertinen t%20laws%2C%20the%20building%20official%20shall%20reject%20such%20application%20in%20writing%2C%20stating%20the%20reasons%20therefore
- https://up.codes/viewer/colorado/ibc-2021/chapter/17/special-inspections-and-
 - $\underline{\text{tests}\#1707.1}:\sim\underline{\text{text}}=\text{the}\%20\text{building}\%20\text{sflicial}\%20\text{shall}\%20\text{accept}\%20\text{duly}\%20\text{authenticated}\%20\text{reports}\%20\text{from}\%20\text{approved}\%20\text{agencies}\%20\text{in}\%20\text{respect}\%20\text{to}\%20\text{the}\%20\text{shall}\%20\text{accept}\%20\text{duly}\%20\text{authenticated}\%20\text{reports}\%20\text{from}\%20\text{approved}\%20\text{agencies}\%20\text{in}\%20\text{respect}\%20\text{to}\%20\text{the}\%20\text{shall}\%20\text{accept}\%20\text{duly}\%20\text{authenticated}\%20\text{reports}\%20\text{from}\%20\text{approved}\%20\text{agencies}\%20\text{in}\%20\text{respect}\%20\text{to}\%20\text{the}\%20\text{shall}\%20\text{accept}\%20\text{duly}\%20\text{authenticated}\%20\text{reports}\%20\text{from}\%20\text{approved}\%20\text{agencies}\%20\text{in}\%20\text{respect}\%20\text{to}\%20\text{the}\%20\text{shall}\%20\text{accept}\%20\text{duly}\%20\text{authenticated}\%20\text{reports}\%20\text{from}\%20\text{approved}\%20\text{agencies}\%20\text{in}\%20\text{respect}\%20\text{to}\%20\text{the}\%20\text{shall}\%20\text{accept}\%20\text{shall}\%20\text{accept}\%20\text{shall}\%20\text{accept}\%20\text{shall}\%20\text{accept}\%20\text{shall}\%20\text{accept}\%20\text{shall}\%20\text{accept}\%20\text{shall}\%20\text{accept}\%20\text{shall}\%20\text{accept}\%20\text{shall}\%$ guality%20and%20manner%20of%20use%20of%20new%20materials%20or%20assemblies%20as%20provided%20for%20in%20Section%20104.11
- 18 https://iaf.nu/en/about-iaf-
 - $\underline{\mathsf{mla}\#.\text{-:}\mathsf{text=it}\%20\mathsf{is}\%20\mathsf{required}\%20\mathsf{to}\%20\mathsf{recognise}\%20\mathsf{certificates}\%20\mathsf{and}\%20\mathsf{validation}\%20\mathsf{and}\%20\mathsf{verification}\%20\mathsf{statements}\%20\mathsf{issued}\%20\mathsf{by}\%20\mathsf{conformity}\%20\mathsf{assessmen}}$ t%20bodies%20accredited%20by%20all%20other%20signatories%20of%20the%20IAF%20MLA%2C%20with%20the%20appropriate%20scope
- 19 True for all ANAB accredited product evaluation agencies and all International Trade Agreements.
- 20 https://www.justice.gov/crt/deprivation-rights-under-color-law AND https://www.justice.gov/atr/mission
- Unless otherwise noted, all references in this Listing are from the 2021 version of the codes and the standards referenced therein. This material, product, design, service and/or method of construction also complies with the 2000-2021 versions of the referenced codes and the standards referenced therein.
- 22 https://www.ecfr.gov/current/title-24/subtitle-B/chapter-XX/part-3280#p-3280.2(Listed%20or%20certified); https://up.codes/viewer/colorado/ibc-2021/chapter/2/definitions#listed AND https://up.codes/viewer/colorado/ibc-2021/chapter/2/definitions#labeled
- 23 2015 IRC Section R507.2
- 24 2015 IRC Table R507.2
- 25 2015 IRC Table R507.2
- 26 2015 IRC Table R507.2
- 27 2015 IRC Table R507.2
- 28
- https://up.codes/viewer/colorado/ibc-2021/chapter/17/special-inspections-and-tests#1703.4 https://www.ecfr.gov/current/title-24/subtitle-B/chapter-XX/part-
 - 3280#:~:text=All%20construction%20methods%20shall%20be%20in%20conformance%20with%20accepted%20engineering%20practices%20to%20insure%20durable%2C%20liv able%2C%20and%20safe%20housing%20and%20shall%20demonstrate%20acceptable%20workmanship%20reflecting%20journeyman%20quality%20of%20work%20of%20the%20workmanship%20reflecting%20journeyman%20quality%20of%20work%20of%20the%20workmanship%20reflecting%20journeyman%20quality%20of%20work%20of%20the%20workmanship%20reflecting%20journeyman%20quality%20of%20work%20of%20the%20workmanship%20reflecting%20journeyman%20quality%20of%20work%20of%20the%20workmanship%20reflecting%20journeyman%20quality%20of%20work%20of%20the%20work%20of%20the%20work%20of%20the%20work%20of%20the%20work%20of%20the%20work%20of%20the%20work%20of%20the%20work%20of%20the%20the%20work%20of%20the%20work%20of%20the%20work%20of%20the%20work%20of%20the%20the%20work%20of%20the%
- https://www.ecfr.gov/current/title-24/subtitle-B/chapter-XX/part-3280#:~:text=The%20strength%20and%20rigidity%20of%20the%20component%20parts%20and/or%20the%20integrated%20structure%20shall%20be%20determined%20by%20 engineering%20analysis%20or%20by%20suitable%20load%20tests%20to%20simulate%20the%20actual%20loads%20and%20conditions%20of%20application%20that%20occur





- The term "band joist" is used throughout this report. Other regionally used terms synonymous with band joist include rim board, band board, header board and header joist.
- 32 2015 IRC Section R507.2
- 33 2015 IRC Table R507.2
- 34 Qualification is performed by a legislatively defined <u>Accreditation Body</u>. <u>ANSI National Accreditation Board (ANAB)</u> is the largest independent accreditation body in North America and provides services in more than 75 countries. <u>Dr.J</u> is an ANAB accredited <u>product certification body</u>.
- ³⁵ See Code of Federal Regulations (CFR) <u>Title 24 Subtitle B Chapter XX Part 3280</u> for definition.
- 36 2015 IRC Section R507.2
- 37 <u>2018 IFC Section 104.9</u>
- Approved is an adjective that modifies the noun after it. For example, Approved Agency means that the Agency is accepted officially as being suitable in a particular situation. This example conforms to IBC/IRC/IFC Section 201.4 where the building code authorizes sentences to have an ordinarily accepted meaning such as the context implies.
- https://up.codes/viewer/wyoming/ibc-2021/chapter/17/special-inspections-and-tests#1707.1
- 40 Multilateral approval is true for all ANAB accredited product evaluation agencies and all International Trade Agreements.
- 41 http://www.drjengineering.org/AppendixC AND https://www.drjcertification.org/cornell-2016-protection-trade-secrets
- 42 https://www.law.cornell.edu/uscode/text/18/1832#:~:text=imprisoned%20not%20more%20than%2010%20years
- 43 https://www.law.comell.edu/uscode/text/18/1832#:~:text=Any%20organization%20that,has%20thereby%20avoided
- https://up.codes/viewer/wyoming/ibc-2021/chapter/17/special-inspections-and-tests#1706.2
- ⁴⁵ IBC 2021, Section 1706.1 Conformance to Standards
- 46 IBC 2021, Section 1707 Alternative Test Procedure, 1707.1 General
- See Section 11 for the distilled building code definition of Approved
- Los Angeles Municipal Code, SEC. 98.0503. TESTING AGENCIES
- https://up.codes/viewer/california/ca-building-code-2022/chapter/17/special-inspections-and-tests#1707.1
- New York City, The Rules of the City of New York, § 101-07 Approved Agencies
- New York City, The Rules of the City of New York, § 101-07 Approved Agencies
- https://up.codes/viewer/new_jersey/ibc-2018/chapter/17/special-inspections-and-tests#1707.1
- 53 https://www.nj.gov/dca/divisions/codes/codreg/ucc.html
- https://www.ecfr.gov/current/title-24/subtitle-B/chapter-XX/part-3282/subpart-A/section-3282.14
- https://www.ecfr.gov/current/title-24/subtitle-B/chapter-XX/part-3280
- ⁵⁶ IBC 2021, Section 1706 Design Strengths of Materials, 1706.2 New Materials. Adopted law pursuant to IBC model code language 1706.2.
- 57 IBC 2021, Section 1707 Alternative Test Procedure, 1707.1 General. Adopted law pursuant to IBC model code language 1707.1.
- https://www.nspe.org/resources/issues-and-advocacy/professional-policies-and-position-statements/regulation-professional AND https://apassociation.org/list-of-engineering-boards-in-each-state-archive/
- ⁵⁹ IBC 2021, Section 1706 Design Strengths of Materials, Section 1706.1 Conformance to Standards Adopted law pursuant to IBC model code language 1706.1.
- 60 https://iaf.nu/en/about-iaf
 - mla/#:~:text=it%20is%20required%20to%20recognise%20certificates%20and%20validation%20and%20verification%20statements%20issued%20by%20conformity%20assessment%20bodies%20accredited%20by%20all%20other%20signatories%20of%20the%20IAF%20MLA%2C%20with%20the%20appropriate%20scope
- True for all ANAB accredited product evaluation agencies and all International Trade Agreements.
- 62 https://www.justice.gov/crt/deprivation-rights-under-color-law AND https://www.justice.gov/atr/mission

Subject to Renewal: 07/01/25